



NOVA CONTROLS

PRO-FLOW



Pro-Flow Dispenser with Wall Transformer and Handheld IR Remote Programmer

Dispenser & Remote Programmer

Prevent BIG Drain Problems with the little dispenser from Hydro NOVA

Pro-Flow is a compact, easy-to-use dispenser of natural enzyme chemistries that dissolve grease, food and other organic matter in drains and pipes. Pro-Flow automatically dispenses product based on preset formulas and does not need user action to start or stop operation.

Pro-Flow is programmed at installation, via the installer's hand-held Remote Programmer. The remote is designed to program one or multiple units, with point-and-click ease. Rather than repeatedly entering similar formulas into each customer's dispenser, three formulas are stored in the remote's memory and "beamed" via infrared (IR) technology to the chosen dispenser.

By combining easy dispenser installation with point-and-click programming, the Pro-Flow keeps drains operating efficiently, thereby:

- Avoiding Costly Rooter Cleanings
- Eliminating Odor and Reducing the Need for Odor-Control Technologies
- Using Safe, Natural Enzymes Instead of Harsh, Alkaline Chemicals

Features

Remote Programming

All programming, time settings and operational status information is "beamed" between the installer's handheld remote programmer and the Pro-Flow, with "point-and-click" ease.

Cost Effective

Simple installation, and the Remote Programmer's "enter once, program many" feature, means lower installed and total cost over the life of each unit—and less installation time.

Easy to Mount

Mounts in just minutes with either peel and stick "hook-and-loop" fasteners or wall anchors & screws.

No User Training Required

The Pro-Flow operates automatically, throughout the week, using pre-programmed formulas. The dispenser has no operating buttons or specific language requirements. No need for the customer to turn the Pro-Flow on or off! Two LEDs indicate low battery and power-on status.

Compact Size

A Pro-Flow dispenser has the footprint of a 3 x 5 index card and doesn't need to be within reach. This makes Pro-Flow ideal for those small, hard-to-get-to spots—under a sink, high on a wall, or mounted on an out-of-the-way product container.

Language Neutral Dispenser

The Pro-Flow operates consistently, regardless of the user's native language. Two LEDs are clearly labeled with universal icons to indicate low-battery and power-on.


Choice of Installation Configurations

No need to be near a power outlet. You can use either a wall transformer or battery box to power Pro-Flow. Mount it on a wall, on the side of a machine, or on our custom product container lid.

Installation & Operation Guidelines



**Pro-Flow Dispenser w/
Battery Pack**

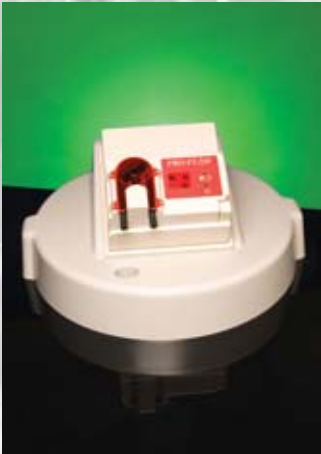

**Pro-Flow Dispenser with
Product Container Lid and
Battery Pack**



Pro-Flow Dispenser with Wall Transformer

Install Pro-Flow indoors on a vertical surface or product container lid. After installation, the customer experiences hands-free dispensing and can view two LEDs with universal icons for *POWER-ON* and *LOW BATTERY*.

After setting the Remote Programmer's current day and time, choose either the factory pre-set formula (3 oz./Midnight/Every Day) or modify it to suit your customer's needs. A built-in battery backup maintains the 24-hour clock and up to three programmed formulas regardless of whether the remote is powered ON or OFF.

During service calls, "beam" a formula to any Pro-Flow dispenser and/or check the dispenser's battery life and currently used program with the press of a button. At installation (or after product container changes) press the prime button on either the remote or the dispenser for uninterrupted product supply.

Specification

- Size—5.18" W x 3.5" H x 1.9" D
13.2cm W x 8.9cm H x 4.8cm D
- Weight—5.6 lbs. (159g)
- Electrical—100-240 VAC, 50-60 Hz, 1 A
- Total Amp. draw during operation—400 mA
- Pump Flow Rate 6 oz./min.
180-200 ml/min.

Ordering Information

Model	Description
P/N 00-08100-110	Pro-Flow Dispenser with Battery Pack
P/N 00-08105-1100	Pro-Flow Dispenser with Wall Transformer, 115 VAC, 60Hz
P/N 55-08095-00	Handheld IR Remote Programmer
P/N 08110-110	Pro-Flow Dispenser with Product Container Lid and Battery Pack

LIMITED WARRANTY

This unit is warranted against defects in materials and workmanship for a period of one year from the date of delivery and covers all parts of the unit except the elastomer pump tubing. Any units which prove to be defective within the warranty period will be repaired or replaced when returned to the factory, freight prepaid. No other warranty is expressed or implied. Equipment abuse or misuse voids warranty. Warranty does not cover any consequential liability resulting from the performance of the equipment.



NOVA CONTROLS
LEADING THE WAY
A Hydro Systems Company